


Z-Brackets and Wing Brackets

1. This mount is intended for mounts with masonry on sides and below EMC, and provides an overall depth of 18.25".
2. Brackets will not be pre-drilled, installer to field provide holes based on site conditions including overall depth desired.
3. Minimum distance between angles on back of EMC is 2".
4. Minimum distance between side masonry and EMC sides is 2".
5. Maximum distance between side masonry and EMC sides is 16.25".


16" LONG Z-BRACKET

(Qty. 2 included)

2"X2"X1/8" STEEL ANGLES WELDED
TO 2"X2"X1/8" STEEL TUBING



FRONT VIEW

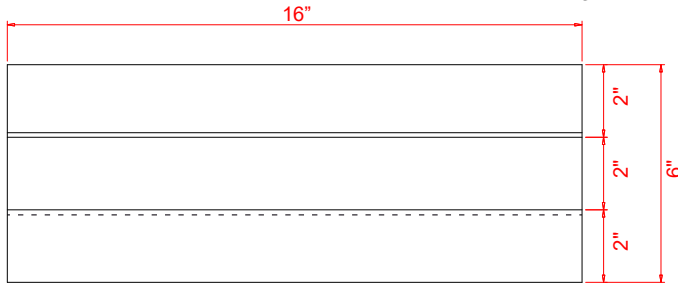


TOP VIEW

24" Wing Bracket

(Qty. 2 included)

2"X2"X3/16" STEEL TUBE

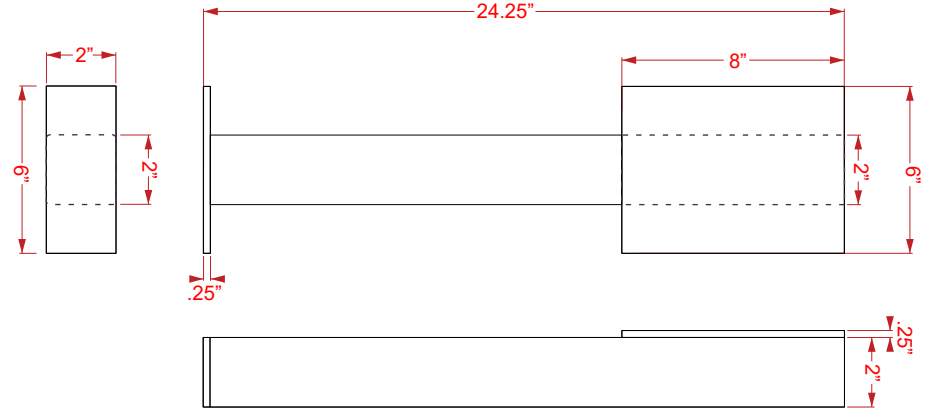

APPLICATION EXAMPLE

